

KEYPAD MODULE

KPM-C22 / KPM-C22D



KEY FEATURES

- + RGB Backlit Keys with Customizable Icons
- + Ambient Light Sensor
- + Adjustable Key Brightness
- + CAN Bus Interface
- + Low Installation Depth
- + “RIM” Embossing Keys
- + Waterproof Aluminium Housing


Keypad module KPM-C22 uses four distinct keys, it is highly resistant to weather conditions and can survive extreme environments, what makes it perfect for installation outside or inside driver cabin. The keys are large, well-spaced and “RIM” embossed, allowing a reliable pressure sensation with a tactile feedback even when wearing protective gloves. The keys can also be used in combination as warning lights.

Keypad is programmable. Each key can be configured to operate as a switch or push button. Corresponding key LED is fully configurable, colour and luminance are adjustable. Key label graphics are customizable and backlit coloured according to function groups for easy recognition. Unused keys can be screened off with a dark label. Labels are inserted at the inner side of the front panel of the keypad. Several keypads located on different places can be connected over CAN BUS to collaborate. Keypad modules series KPM-C are a perfect solution in automotive, nautical, agriculture, utility vehicles and industrial sectors.


SPECIFICATIONS

POWER	
Supply Voltage	8-32 V DC
Current	60 mA maximum
Electrical Protection	overvoltage, transients, reverse polarity, load dump
INTERFACES	
CAN	1 x CAN
CAN termination	120 ohm, DIP switch
ENVIROMENT	
IP Class (IEC529)	
with terminal block	front panel - IP67, back - IP51
with Deutsch DT06	complete IP67
EMC Conformity	EN61000-6-2 noise immunity EN61000-6-4 radiation of interference
Temperature Range	storage -40° to +85°C (-40° to 185°F) operating -40° to +85°C (-40° to 185°F)
KEYS	
Key Backlite	RGB LED
Icons	customizable key icons
Brightness	individually adjustable key luminous intensity, ambient light sensor
Key Design	RIM-embossed keys with tactile feedback, dimesion 18 x 18 mm
Operating Life	>250.000 cycles
ENCLOSURE	
Housing Material	Aluminium
Mounting	in-dash with 4 screws M3 or 2.9 mm tapping screws
Connectors	
Power Supply/Can I/O	4 way terminal block or Automotive - Deutsch DT06-6 14 way Terminal Block
SIZE & WEIGHT	
W x H x D	69.7 x 59.8 x 19 without connector
Weight	0.12 kg (IP51), 0.14 kg (IP67)

DIMENSIONS

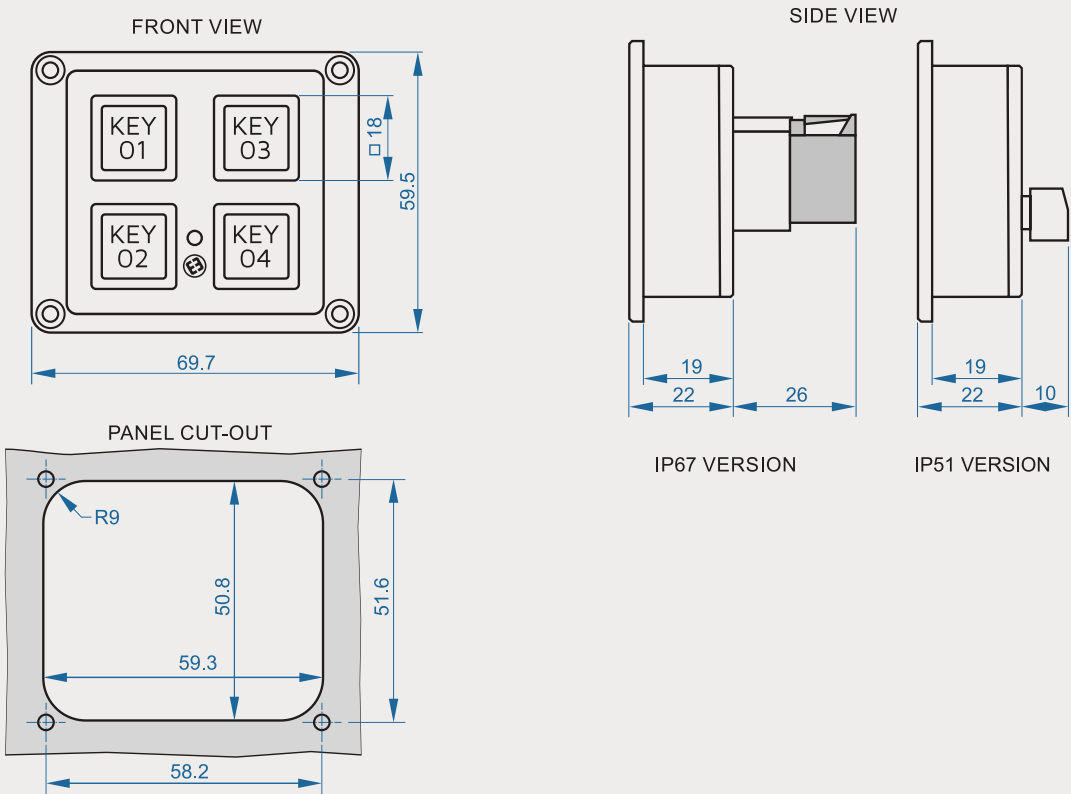

CONNECTIONS

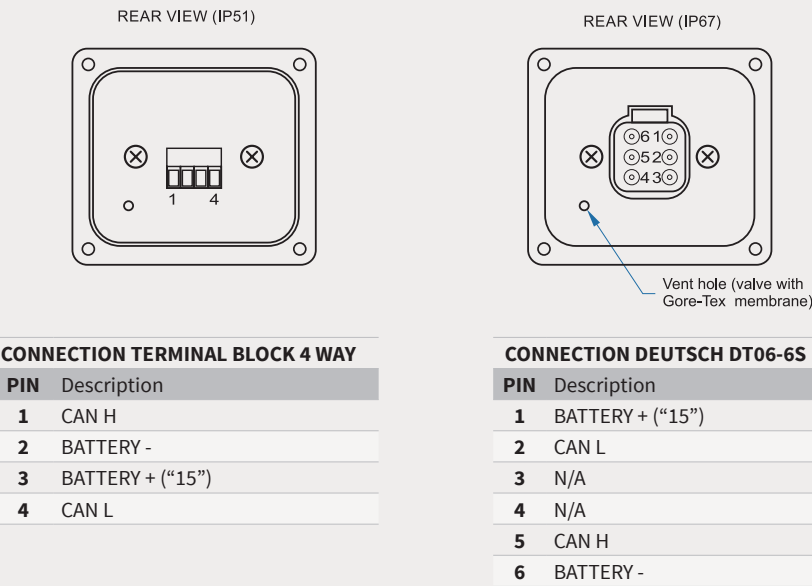

PRODUCT CODE

Ordering code example:

K	P	M	-	C	2	2	D					
		SIGNAL INDIC.		KEY CONFIGURATION		SEALING		SPECIAL FEATURES / APPLICATION				
		C: COLOR -RGB		22: 2-ROW, 2-COLUMN		D: DEUTSCH CONN. IP67						